




SAFETY SHOES WORKWEAR







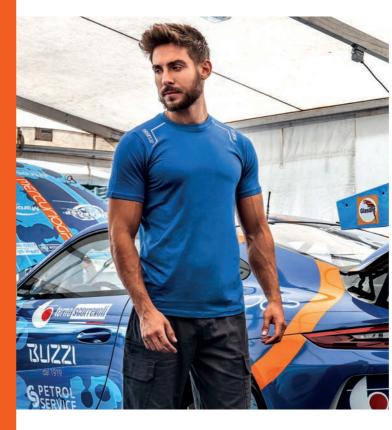











SPARCO AND SAFETY: AN INDISSOLUBLE COMBINATION

When you think about the concept of safety, the connection to Sparco is almost automatic. For more than forty years Sparco has been the official safety supplier of the most important world teams in the most dangerous sport in the world: MOTORSPORT.

Piquet, Prost, Schumacher, Hakkinen, Alonso, Loeb, Hamilton, Sainz (Sr. and Jr.), Ogier, Ricciardo, Norris - just to name a few - have relied or rely on Sparco to guarantee their safety during racing and to have the best performance in terms of comfort, weight and breathability.

Sparco Teamwork is the collection of shoes and workwear in which safety, lightness and design draw inspiration from the motorsport experience, translating into a work key with the same goal: to guarantee maximum performance.



KNOW-HOW **SPARCO TEAMWORK**

Its attention to detail, care devoted to the choice of sustainable materials and its construction of models totally styled, designed and validated in Italy has allowed SPARCO TEAMWORK to develop safety footwear with new sporty, comfortable and resistant lines in compliance with the ESSENTIAL REQUIREMENTS OF HEALTH AND SAFETY defined by Regulation (EU) 2016/425 on Personal Protective Equipment (PPE) with the (£ mark.

Sparco Teamwork also wants to respond to all those workers who question the social costs demanded by the environment and the situations of exploitation of labour for their production

- A conscious and efficient use of environmental resources as common assets;
- The ability to enhance human resources and contribute to the development of the local community in which the company operates;
- Control of the entire supply chain by integrating environmental and energy factors, the safety of materials, biodegradability, recycling and logistics;
- Respect for the fundamental rights of people and workers considering compliance with labour law, protection against child exploitation, guarantees of safety and health
- The enhancement of diversity and inclusion by promoting gender plurality, ethnic, religious and sexual diversity and psycho-physical skills in order to improve people's motivation through training courses dedicated to professional development.

We are convinced that a new SPARCO TEAMWORK brand safety shoe can be born only from new business models and projects that take into account the aforementioned fundamentals.



CONTENTS

2022

SAFETY SHOES LINES



























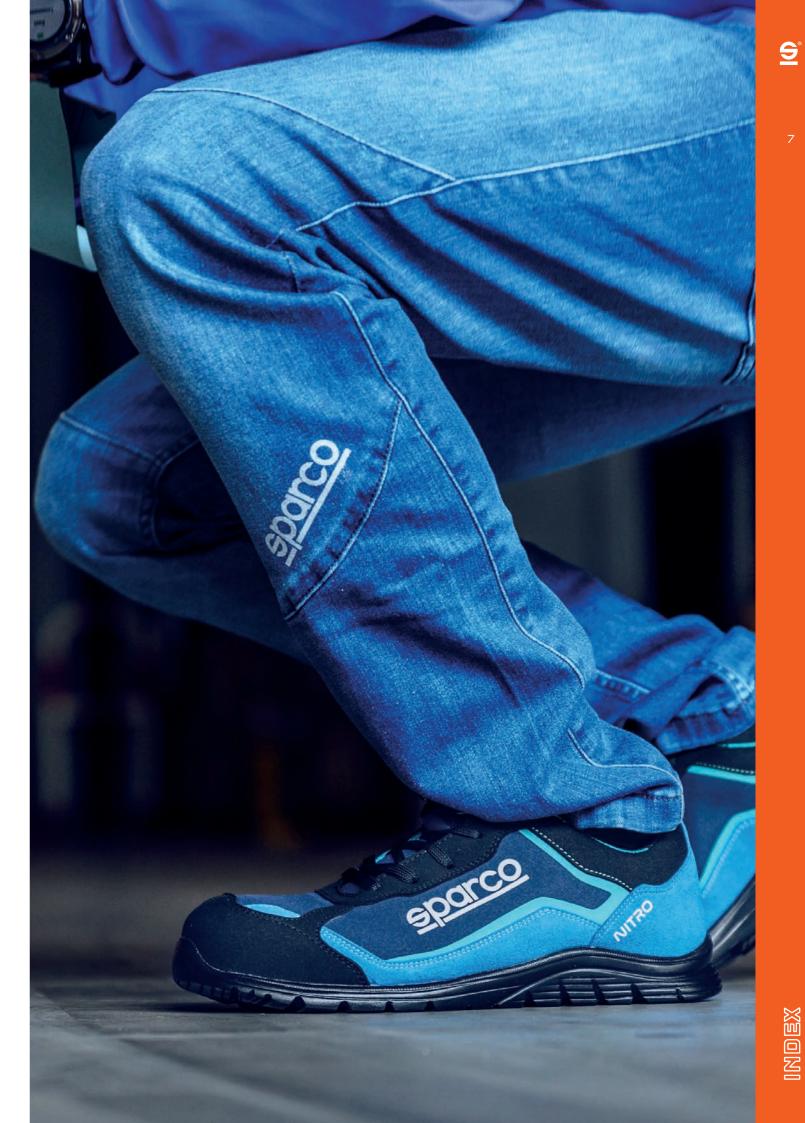

CONTENTS

2022

WORKWEAR



























TEAMWORK TECHNOLOGY

TEAMWORK

TECHNOLOGY

SPARCO TEAMWORK shoes are developed using the best technologies in terms of soles and midsoles, in order to optimize the exertion produced in walking by the sole of the foot where the greatest stresses for the user are concentrated, thus returning 70% of the ENERGY produced.

This benefit offers advantages in using SPARCO TEAMWORK footwear, such as

- less fatigue at the end of the day, thus improving reflexes and attention to the dangers of slipping and tripping injuries
- less exertion in walking
- less strain on the back and spine
- relaxation of the muscles



provided by a thick ultralight EVA midsole and MULTIGRIP RUBBER tread.



the world of racing, ergonomically designed on the soles of the foot to ensure an extensive support surface.



designed for intensive use where the foot bends



with PRISMA texture that provides strong grip in all foot bending conditions.



The special design of the MOTIONGRIP sole lugs is conceived to follow all the movements of the foot, guaranteeing ultimate grip.



Ultralight sole with PHYLON midsole and CROSSGRIP rubber tread with lugs that guarantee a strong grip even on particularly uneven surfaces.



Ultralight dual-density polyurethane sole designed to facilitate dynamic use and move safely



Ultralight sole with phylon midsole and rubber tread. Ideal for all uses, even for outdoors in leisure time.



GYMKHANA













Line MARTINI RACING

GYMKHANA

















002020MR..

SPECIFICATIONS:

Original replica suit of the iconic Sparco - Martini Racing Mechanic suit.

MATERIAL:

85% polyester 15% cotton

SIZES: S-XXL


sparco-official.com

PRACTICE





ULTRA-FLEXIBLE SINGLE-DENSITY PU THAT INCREASES COMFORT AND REDUCES STRESS TO THE LOWER LIMBS AND THE SPINE.



JOS S1P SRC 07517..NRGF METAL TOE CAP: in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. single-density PU with energy absorption on the heel. **REMOVABLE INSOLE:** antistatic in PU with ergonomic thermoforming. LINING: breathable micro-perforated 3D fabric. UPPER: breathable micro-perforated fabric and scratch-resistant microfibre with high abrasion resistance. SIZES: 36-48 (UK 3 ½-13)








Line

PRACTICE







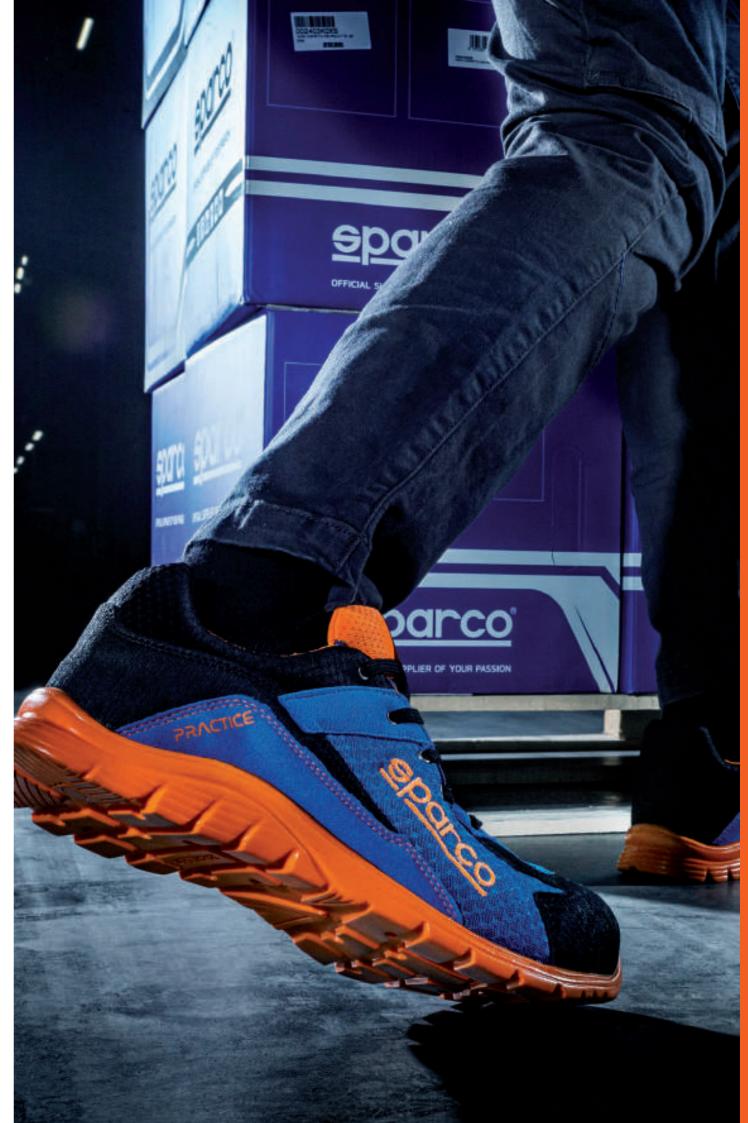







TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

single-density PU with energy absorption on the heel.

REMOVABLE INSOLE:

antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

UPPER:

in high-quality water-repellent microfibre.

SIZES:

36-48 (UK 3 ½-13)

DIDIER S3 SRC

PETTER S3 SRC

07522..NRGR



TOE CAP: in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

single-density PU with energy absorption on the heel.

REMOVABLE INSOLE:

antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

in high-quality water-repellent microfibre.

SIZES:

36-48 (UK 3 ½ -13)

MARCUS S3 SRC

07522..RSNR



in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

TOE CAP:

single-density PU with energy absorption on the heel.

REMOVABLE INSOLE:

antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

in high-quality water-repellent microfibre and suede.

SIZES: 36-48 (UK 3 ½ -13)

(EN ISO 20345:2011

Line NITRO

NITRO









Line

CUP



RICARD S1P SRC

07526..NRAZ



TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

EVA midsole and nitrile rubber tread with energy absorption on heel.

REMOVABLE INSOLE:

antistatic in PU with ergonomic thermoforming.

LINING:

breathable micro-perforated 3D fabric.

Ultra-breathable jacquard weave with PU film reinforcement coating on the toe.

SIZES:

35-46 (UK 2 ½-11 ½)

ADELAIDE S1P SRC

07526..NRVF



in non-magnetic composite, insulating, resistant to 200J. **ANTI-PERFORATION INSOLE:** made from zero-perforation textile fibre. EVA midsole and nitrile rubber tread with energy absorption on heel.

REMOVABLE INSOLE:

antistatic in PU with ergonomic thermoforming.

LINING:

TOE CAP:

breathable micro-perforated 3D fabric.

Ultra-breathable jacquard weave with PU film reinforcement coating on the toe.

SIZES:

35-46 (UK 2 ½-11 ½)

ALBERT SIP SRC

07526..NRRS



TOE CAP: in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

EVA midsole and nitrile rubber tread with energy absorption on heel.

REMOVABLE INSOLE:

antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

Ultra-breathable jacquard weave with

PU film reinforcement coating on the toe.

SIZES: 35-46 (UK 2 ½ - 11 ½)

(EN ISO 20345:2011

EVO

PORT

SPORT EVO Line RACING EVO Line

SAFETY FOOTWEAR COMING FROM THE WORLD OF RACING IN HIGH-QUALITY SMOOTH AND SUEDE OR NUBUCK LEATHER, ELEGANT, COMFORTABLE AND HARD-WEARING.

IDEAL FOR OUTDOOR USE.

(€ EN ISO 20345:2011





Profiles to increase grip.

SPORTS SOLE COMING FROM THE MOTORSPORT WORLD WITH EXCELLENT TECHNICAL AND NON-SLIP PROPERTIES PROVIDED BY THE LUGS DESIGNED FOR GREATER DIAGONAL AND LONGITUDINAL GRIP. THE TREAD ASSISTS BENDING WHILE WALKING AND PREVENTS PROBLEMS TO THE LOWER LIMBS AND THE SPINE.



SPA ESD S3 SRC

07516..NRGR

TOE CAP: in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

dual-density PU with energy absorption on the heel.

REMOVABLE INSOLE:

Antistatic in PU with ergonomic thermoforming.

LINING: breathable micro-perforated 3D fabric.

UPPER:

in high-quality nubuck leather with scratch-resistant microfibre heel insert.

SIZES:

38-48 (UK 5 - 13)

RONNIE ESD S3 SRC

CLAY S3 SRC

07515..NRVF

TOE CAP: in non-magnetic composite, insulating, resistant

ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

dual-density PU with energy absorption on the heel.

REMOVABLE INSOLE:

Antistatic in PU with ergonomic

thermoforming.

LINING:

to 200.1

breathable micro-perforated 3D fabric.

in high-quality smooth leather, nubuck leather and water-repellent suede leather, tongue in soft nylon and inserts in scratch-resistant microfibre.

SIZES:

38-48 (UK 5 - 13)



07516..NRNR



TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE: made from zero-perforation textile fibre.

dual-density PU with energy absorption on the heel.

REMOVABLE INSOLE:

Antistatic in PU with ergonomic thermoforming.


LINING: breathable micro-perforated 3D fabric.

in high-quality water-repellent suede

leather with scratch-resistant microfibre heel insert.

SIZES:

38-48 (UK 5 - 13)

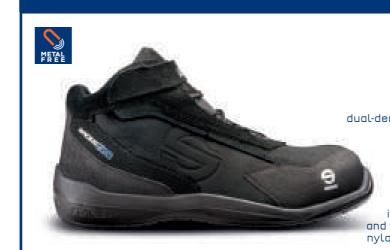

07515..NRNR

in non-magnetic composite, insulating, resistant to 200J

ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

dual-density PU with energy absorption on the heel. **REMOVABLE INSOLE:**

Antistatic in PU with ergonomic thermoforming.

LINING:

breathable micro-perforated 3D fabric.

in high-quality smooth leather, nubuck leather and water-repellent suede leather, tongue in soft nylon and inserts in scratch-resistant microfibre.

SIZES:

38-48 (UK 5 - 13)

EVO

RACING







EVO Line

SPORT

EVO

URBAN





FOR GREATER DIAGONAL AND LONGITUDINAL GRIP. THE TREAD ASSISTS BENDING WHILE WALKING

AND PREVENTS PROBLEMS TO THE LOWER LIMBS

AND THE SPINE.











EGEND







Line

LEGEND





LINING:

UPPER:

SIZES:





ALLROAD







ALLROAD Line

















TOE CAP:

in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

dual-density polyurethane with energy absorption on the heel.

REMOVABLE INSOLE:

antistatic in PU

LINING: breathable micro-perforated 3D fabric.

UPPER: in fine suede with high abrasion resistance.

SIZES:

36-48 (UK 3 ½ -13)

WOKING SIP SRC

07519..NRRS



TOE CAP: in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

dual-density polyurethane with energy absorption on the heel.

REMOVABLE INSOLE:

antistatic in PU

LINING: breathable micro-perforated 3D fabric.

in fine suede with high abrasion resistance.

SIZES:

36-48 (UK 3 ½-13)

ZELTWEG S3 SRC

07524..NRNR



TOE CAP: in non-magnetic composite, insulating, resistant to 200J.

ANTI-PERFORATION INSOLE:

made from zero-perforation textile fibre.

dual-density polyurethane with energy absorption on the heel.

REMOVABLE INSOLE: antistatic in PU

LINING:

breathable micro-perforated 3D fabric.

in water penetration-resistant nylon and suede.

SIZES:

36-48 (UK 3 ½-13)







Footwear designed for all those who are forced to work in environments characterised by a high presence of water. WR footwear is in fact made with materials and techniques that prevent the entry of water while guaranteeing excellent breathability and therefore perfect hygrothermal comfort.

WALK TEST

(according to EN ISO 20345:2011)


1,000 steps (about 20 min.) in a tank containing 3 cm of water, the wet internal surface must be ≤ 3 cm2.



DRS MEMBRANE BY SPARCO TEAMWORK

(DRY RESPIRATION SYSTEM):

The special DRS membrane by SPARCO TEAMWORK ensures maximum breathability and comfort while preventing water from penetrating into the upper, leaving the feet always dry and protected.

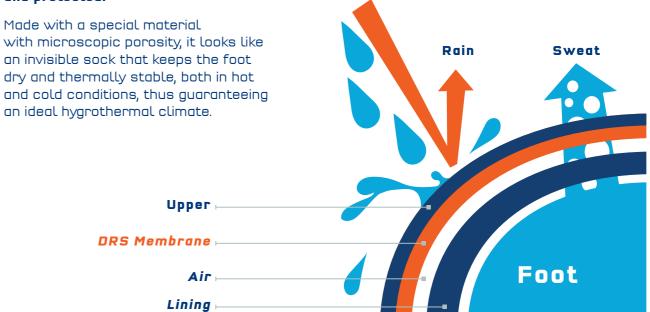

TORQUE







001289..NRAZ

phylon midsole and nitrile rubber tread.

INSOLE: breathable in memory foam.

LINING: breathable micro-perforated 3D fabric.

UPPER:

with breathable micro-perforated fabric, micro-injected reinforcement on ultra-abrasion-resistant toe.


SIZES:

37-47 (UK 4 ½ - 12)

TORQUE






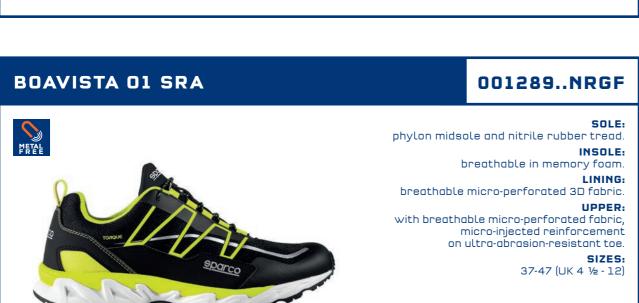







(€ EN ISO 20347:2012

TORQUE



MIKI 01 SRA





phylon midsole and nitrile rubber tread.

INSOLE:

breathable in memory foam LINING:

breathable micro-perforated 3D fabric.

SIZES:

with breathable micro-perforated fabric, micro-injected reinforcement on ultra-abrasion-resistant toe.

37-47 (UK 4 ½ - 12)

REPLICA HOODIE MARTINI RACING

001144MR..

SPECIFICATIONS:

Hooded sweatshirt made with an ultra-soft cotton blend featuring the iconic Martini Racing livery. The logo patches and stripes are fully embroidered.


MATERIAL:


65% cotton - 35% polyester 300 gr. m2 - hood lined in soft jersey







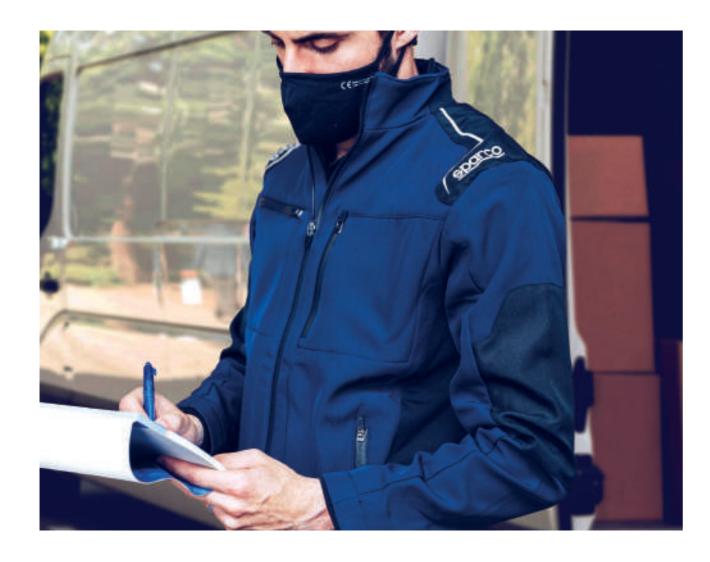

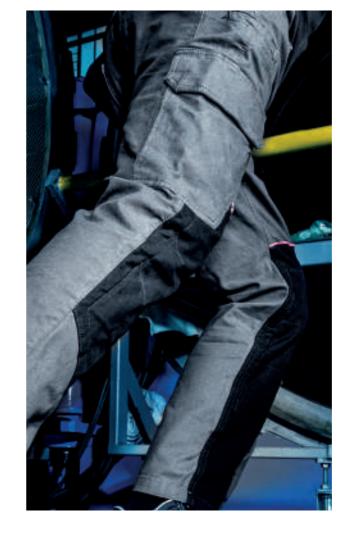



SEATTLE NAVY

02404BM..



SOFTSHELL JACKET

WEIGHT: 270 GR/M²

COMPOSITION: 100% polyester

SIZES: S - 3XL

SPECIFICATIONS:

- Soft and light polyester water-repellent.
- Breathable stretch side inserts.
- Reinforced elbow inserts.
- Removable windproof hood.

SEATTLE BLACK

02404NR..



SOFTSHELL JACKET

WEIGHT: 270 GR/M²

COMPOSITION: 100% polyester

SIZES: S - 3XL

SPECIFICATIONS:

- Soft and light polyester water-repellent.
- Breathable stretch side inserts.
- Reinforced elbow inserts.
- Removable windproof hood.



02401GSRS..



CARGO MULTISEASON PANTS

WEIGHT: 310/320 gr/sqm

COMPOSITION: 98% canvas cotton 2% elastane SIZES: S - 3XL

SPECIFICATIONS:

- Resistant stretch canvas cotton
- padded inserts on knees
- Closing flap with contrasting interior and elasticated sides
- Multi-pocket

DENVER

02409DE..



JEANS

WEIGHT: 350 gr/m²

COMPOSITION: 98% drill cotton • 2% elastane

SIZES: S - 3XL

SPECIFICATIONS:

- Stretch denim.
- Contrasting interior and elasticated sides.
- 5 pockets.









CARGO MULTISEASON PANTS

WEIGHT: 260/270 gr/m²

COMPOSITION: 98% drill cotton • 2% elastane **SIZES**: S - 3XL

SPECIFICATIONS:

- Soft stretch drill cotton
- Closing flap with contrasting interior and elasticated sides
- Multi-pocket

BOSTON GREY

02400NR..




CARGO MULTISEASON PANTS

WEIGHT: 260/270 gr/m²

COMPOSITION: 98% drill cotton • 2% elastane **SIZES**: S - 3XL

SPECIFICATIONS:

- Soft stretch drill cotton
- Closing flap with contrasting interior and elasticated sides
- Multi-pocket

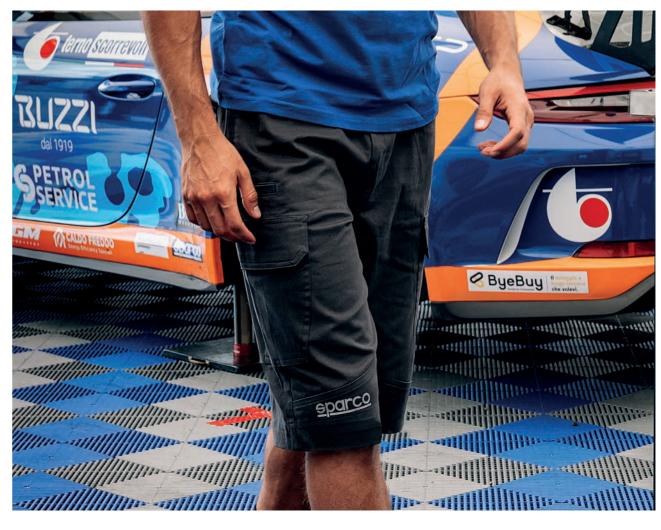

NEW

BERMUDA BLACK

02410NR..



BERMUDA CARGO

WEIGHT: 220 GR/M2

COMPOSITION: 97% cotton 3% elastane lycra gabardin

SIZES: S - 2XL

SPECIFICATIONS:

- Soft and resistant stretch cotton fabric with contrast reinforcement stitching
- Flap closure at the waist with snap button, contrasting interior and elastic at the sides

- Multi-pocket

NEW

BERMUDA GREY

02410GS..



BERMUDA CARGO

WEIGHT: 220 GR/M2

COMPOSITION: 97% cotton 3% elastane • lycra gabardin

SIZES: S - 2XL

SPECIFICATIONS:

- soft and resistant stretch cotton fabric with contrast reinforcement stitching
- flap closure at the waist with snap button, contrasting interior and elastic at the sides
- multi-pocket





WINDSTOPPER JACKET

WEIGHT: 100 gr/m²

COMPOSITION: 100% polyester

SIZES: S - 3XL

SPECIFICATIONS:

- soft and lightweight water-repellent Polyester fabric.
- Coated zips with rubbered pullers.
- Elastic cuffs and hem.



WILSON NAVY

NEW

WINDSTOPPER JACKET

WEIGHT: 100 gr/m²

COMPOSITION: 100% polyester

SIZES: S - 3XL

SPECIFICATIONS:

- Soft and lightweight water-repellent Polyester fabric.
- Coated zips with rubbered pullers.Elastic cuffs and hem.

WILSON BLACK

02405NR..



WINDSTOPPER JACKET

WEIGHT: 100 gr/m²

COMPOSITION: 100% polyester

SIZES: S - 3XL

SPECIFICATIONS:

- soft and lightweight water-repellent
- Polyester fabric.
- Coated zips with rubbered pullers.
- Elastic cuffs and hem.

NEW

WILSON RED

02405RS..

02405BM..



WEIGHT: 100 gr/m²

COMPOSITION: 100% polyester

SIZES: S - 3XL

SPECIFICATIONS:

- Soft and lightweight water-repellent Polyester fabric.
- Coated zips with rubbered pullers.
- Elastic cuffs and hem.

WINDSTOPPER JACKET

SWEATSHIRT

FULL-ZIP





FULL-ZIP SWEATSHIRT

PHOENIX NAVY

WEIGHT: 260 gr/m²

COMPOSITION: outside 100% polyester inside 100% cotton

SIZES: S - 3XL

- SPECIFICATIONS:
 External fabric in soft and light polyester.
 Soft cotton jersey lining.
 Coated zips with rubbered pullers.
 Elasticated cuffs.

PHOENIX RED

02406NR..

02406BM..



FULL-ZIP SWEATSHIRT

WEIGHT: 260 gr/m²

COMPOSITION: outside 100% polyester inside 100% cotton

SIZES: S - 3XL


SPECIFICATIONS:

- External fabric in soft and light polyester.
 Soft cotton jersey lining.
 Coated zips with rubbered pullers.
 Elasticated cuffs.

FULL-ZIP SWEATSHIRT





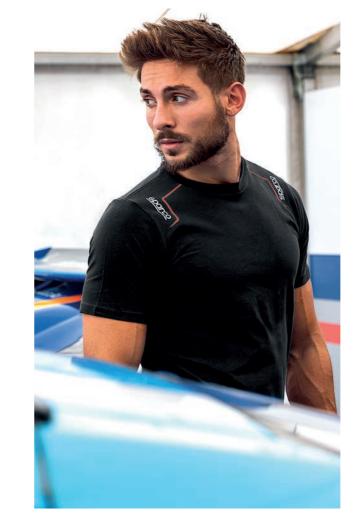







POLO

WEIGHT: 200 gr/m² COMPOSITION: 100% cotton SIZES: S - 3XL

SPECIFICATIONS:

- Soft and light piqué cotton.
- Contrast color inserts.
- Stretch sleeves hem.









NEW

66

GLOVES

SPORTAC (PPE CAT. II) 002097..GI **PROTECTIVE GLOVES** • EN 388:2016 • EN ISO 21420 **PPE CATEGORY II:** Synthetic glove protecting against mechanical risks **ABRASION RESISTANCE:** • 4 (performance levels) **RESISTANCE TO BLADE CUTTING:** • Coupe test: X (not done) **TEAR RESISTANCE:** • 4 (performance levels) **PUNCTURE RESISTANCE:** • 3 (performance levels) **RESISTANCE TO CUTTING** BY BLADE EN ISO 13997: • D (performance levels) **EN PROTECTION AGAINST IMPACTS:** • P (performance level) SIZES: 8-11 SPECIFICATIONS: • Adamant® diamond structure for a maximum level of cutting resistance; • exceptional comfort and dexterity; • palm resistant to grease and wet grime;

MECA III WORK GLOVES COMPOSITION: 47% polyester 35% suede • 18% elastane 002093..BMAF 002093..NRGF | NEW 002093..RS 002093..AZ 002093..NR SIZES: S-XL SPECIFICATIONS: • the palms are in synthetic, abrasion-resistant leather and there are reinforcements positioned between the thumb and index finger; • back in abrasion-resistant stretch and printed fabric; • fastening strap to adjust fit.





MULTIPURPOSE GLOVES

in micro-perforated polyamide and palm in high-grip microfibre, with fastening strap.

• impact resistant on the back, shock absorbing

structure on the palm of the hand.

COMPOSITION:

- 85% polyamide
- 15% elastane

SIZES: S-XL


SPECIFICATIONS:

- touch-sensitive fingertips on index and thumb;
 - foam protectors on the palm;
 - wrist fastening strap.







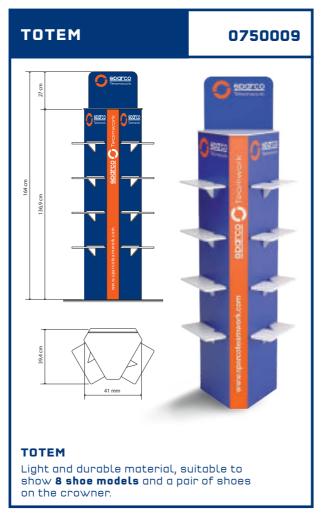





NEW









CERTIFICATIONS

AND CESTANDAR

GUIDE TO EN ISO 20345:2011 STANDARDS

Footwear for professional use in accordance with EN ISO 20345:2011 are marked with an "5" (Safety) as Safety Footwear. The so-called "basic" shoe is marked with the letters "SB" (S = Safety - "B" = Basic). This footwear must have the following minimum requirements:

- height of the upper toe cap (minimum length, minimum supporting base) upper in fresh split leather, microfibre and similar • front lining • insole • sole in any type of material, can be smooth
- the upper, in the low footwear, can be opened in the heel area.

In "SB" footwear, the following requirements are never included unless specified in detail:

- antistatic energy absorption of the heel dynamic waterproofing of the upper sole with lugs
- rear lining water-repellent upper anti-puncture plate or fabric.

The meaning of the stamping that you can find on the footwear is given below. They have been designed, equipped with toe caps designed to provide protection against impact when tested at an energy level of 200J".

EN ISO 20345:2011

Protective footwear in accordance with EN ISO 20345:2011 is called "Protective footwear".

It is basically identical to safety footwear. The only differences are the following:

- impact protection toe cap with energy of 100 J and compression of 10 KN
- it is marked with "P" (Protective) in place of the "S" (Safety).

NB: use in all workplaces where the protection of 100 J is sufficient.

THE MEANING OF THE EUROPEAN STANDARDS

EN ISO 20349:2010 Small splashes of molten metal such as those produced during welding operations and related processes.

EN ISO 20344:2011 Test methodology and general requirements.

EN ISO 20345:2011 Specifications of safety footwear with toe resistance at 200 J.

EN ISO 20346:2011 Specifications of protective footwear with toe resistance at 100 J.

EN ISO 20347:2012 Specifications of "work" or "professional" footwear. No specific toe cap resistance.

UNI 11583:2015 Footwear marked UNI 11583:2015 meets the requirements of the UNI 11583:2015 standard which specifies the requirements for safety, protective and work footwear for professional use for work on sloping roofs.

FOOTWEAR CLASSIFIED "S"						
SB	BASIC Requirements					
S1/01	S1/01 BASIC requirements + S1 supplemented by:	 closed back (also low footwear) antistatic FO resistance to hydrocarbons energy absorption capacity of the heel 				
S2/02	S2/02 BASIC requirements + S2 supplemented by:	 dynamic waterproofing of the upper material 				
S3/03	S3/03 BASIC requirements + S3 supplemented by:	anti-puncture platesole with lugs or tread				
S4/04	S4/04 BASIC requirements + S4 supplemented by:	 antistatic energy absorption of the heel FO resistance to hydrocarbons 				
S 5	S5 BASIC requirements + S5 supplemented by:	anti-puncture platesole with lugs or tread				

	SLIP RESISTANCE CLASSES
SRA	Slip resistance with ceramic ground with water and detergent.
SRB	Slip resistance with steel and glycerine ground.
SRC	Slip resistance with both conditions described above.

All Sparco Teamwork safety footwear is certified with SRC class slip resistance.

Marking of conformity with Regulation		Nome del fabbricante SPARCO		Production date 0½022
(EU) 2016/425	\$	SRC W	VR	00000 - LANDO
EN ISO 20345:2011 European standard	Protection class	Slip resistance requirement	Additional requirements	Product code

The following are affixed on the gusset or on the tongue of the shoe:

· manufacturer's mark · the article code · the month and year of manufacture · (€ conformity marking

PROTECTION CLASS SYMBOL		EN ISO 20345:2011		EN ISO 20347:2012			EN ISO EN ISO 20345:2011 20347:2012			Minimum required values EN ISO 20345:2011 + EN ISO 20347:2012				
		SB	S1	S2	53	OB	01	02	03	S4	S5	04	05	
	Closed heel area	0	٠			0								
	Toe cap resistant to an impact of 200J					-	-	-	-			-	-	Mechanical risk, toe protection, falling objects, foot impacts, height after impact ≥ 14mm (size 42)
	Toe cap resistant to static compression of 15 kN	•	•	•	•	-	-	-	-	•	•	-	-	Mechanical risk, toe protection, falling objects, foot impacts, height after impact ≥ 14mm (size 42)
A	Antistatic footwear	0	•	•	•	0	•	•	•	•	•	•		Electrical resistance of the bottom compressed between 1x105 OHM and 1x109 OHM
E	Energy absorption in the heel area	0			•	0	•	•	•					Mechanical risk: reduction of trauma to the heel resulting from impacts or falls from limited heights, mechanical energy ± 20 Joules
FO ex oro	Resistance to hydrocarbons of the sole	0	٠			0	0	0	0	•	•	0	0	Volume increase of the sole sample < 12%
WRU	Penetration and water absorption of the upper	0	-			0	0		•	-	-	-	-	Resistance to penetration and absorption of water from the upper. H2O absorption after 60' £ 30% H2O transmitted after 60' £ 0.2 g
Р	Resistance to perforation of the bottom of the footwear	0	0	0	•	0	0	0	•	0	٠	0	•	F ≥ 1100 N
CI	Insulation from the cold of the bottom of the footwear	0	0	0	0	0	0	0	0	0	0	0	0	Increase T ≥ 22°C placed on a plate at a T of 150°C for 30'
ні	Insulation from the heat of the bottom of the footwear	0	0	0	0	0	0	0	0	0	0	0	0	Decrease T ≥ 10°C in an environment at -17°C for 30'
С	Conductive footwear	0	-	-	-	0	-	-	-	-	-	-	-	Electrical resistance of the bottom < 1x105 OHM
HRO	Heat resistance by contact of the sole	0	0	0	0	0	0	0	0	0	0	0	0	Sample in contact at 300°C for 60"- Does not melt
AN	Ankle protection	0	0	0	0	0	0	0	0	0	0	0	0	Mechanical risk, ankle protection: average value transmitted force ≥ 10 kN maximum value <15 kN
\triangle	Electrically insulating footwear (Dielectric)	0°	-	-	-	0	-	-	-	0	0	0	0	Class 00 or Class 0 - CEI EN 50321 standard
WR	Water resistant footwear	0	0	0	0	0	0	0	0	-	-	-	-	After 1000 steps or after 80' of automatic dynamic cycle, no more than 3 cm2 of water must enter (stain)
М	Metatarsal protection	0	0	0	0	-	-	-	-	0	0	-	-	Mechanical risk, metatarsal protection: falling objects, impact to the foot. Height after impact ≥ 40 mm (size 42)
CR	Cutting resistance of the upper-F ≥ 1100 N	0	0	0	0	0	0	0	0	0	0	0	0	F ≥ 1100 N
SRC	(SRA+SRB) Requisito di antiscivolo	•	•	•	•	•	•	•	•	•	•	•		Protezione contro lo scivolamento su diverse superfici

- = Mandatory requirement for the indicated category
 = Optional requirement added to the mandatory ones, if indicated on the marking -= Non-mandatory requirement, check shoe stamping


ESD CEI EN 61340-5-1 2016 | COR 1:2017 STANDARD

The abbreviation ESD (ElectroStaticDischarge) indicates a discharge of static energy that passes from one body to another. In hazardous workplaces, ESD discharges can be the cause of even serious accidents (starting a fire). and can damage machinery and their sensitive components.

- Work with microchips
 Production of sensitive electrical parts
 In painting
- Wthen working in contact with flammable liquids and gases

Evaluated on ESD by conditioning the shoe at 12% relative humidity:

- resistance of the footwear/operator combination | metal electrode less than 1x10-9 ohm
- storage capacity of the electric charge of the footwear/operator combination| metal electrode less than 100 volts



REGULATION (EU) 2016/425

Article 47: EC certificates issued in accordance with Directive 89/686/EEC are valid until 21/04/2023.

After 21/04/2019, all new models must be certified according to Regulation 2016/425.

COMPLIANCE WITH THE REACH REGULATION

The company complies with the REACH Regulation (EC) no. 1907/2006 in force since 1 June 2007, ensuring that the products used and supplied by SPARCO TEAMWORK:

CERTIFICATIONS

- do not contain SVHC (Substance of Very High Concern) substances;
- do not contain substances that are on the list in Annex XIV_ of the REACH Regulation;
- do not contain substances that are on the constantly updated Candidate List;
- do not contain substances subject to restrictions (Annex XVII of REACH) that the relative restrictions of use are observed.

Furthermore, in the event that an article contains an SVHC (Substance of Very High Concern) substance or one on the Candidate List in concentrations higher than 0.1% weight/weight, sufficient information is provided with the name of the substance and instructions helpful for the safe use of the article (see Article 59.1 of REACH).

ALPHABETICAL INDEX

MIKI

ALPHABETICAL

INDEX

SHOES LINES

•ADELAIDE	Page 27
•ALBERT	Page 27
•ALGARVE	Page 48
•ARCTIC	Page 45
•BAKU	Page 38
•BOAVISTA	Page 48
•BRUCE	Page 30
•CHARADE	Page 48
•CLAY	Page 29
•DANI	Page 14
•DIDIER	Page 23
DONINGTON	Page 30
•DURANGO	Page 47
•FLAP	Page 36
•GILLES	Page 30
•HALO	Page 36
•HANNU	Page 24
•HINWIL	Page 43
JACQUES	Page 19
•10DA	Page 19
•J0S	Page 18
•KEKE	Page 20
·LANDO	Page 14
•LONATO	Page 33
•LOSAIL	Page 28
•MAGIONE	Page 32
•MARCUS	Page 23
•MARTINI	Page 17
•MAX	Page 15

Page **51**

•MIKKO	Page 24
•MODENA	Page 32
•MOTEGI	Page 39
•NELSON	Page 20
•NIGEL	Page 18
•NIKI	Page 20
•OKAYAMA	Page 40
•OTT	Page 24
•PALMA	Page 46
•PETTER	Page 23
•RICARD	Page 27
•RONNIE	Page 29
•SARNO	Page 33
•SEB	Page 15
•SOCHI	Page 40
•SPA	Page 28
•SPLITTER	Page 34
•SPOILER	Page 35
•STIRIA	Page 40
•WING	Page 36
•WOKING	Page 43
•ZELTWEG	Page 43

WORKWEAR

•BERMUDA	Page 57	PORTLAND	Page 62
•BOSTON	Page 56	•SEATTLE	Page 54
•DENVER	Page 55	•TRENTON	Page 63
HOUSTON	Page 55	•WILSON	Page 59
•PHOENIX	Page 61		

GLOVES

HYPERGRIP	Page 66
MECA III	Page 67
SPORTAC	Page 66

POP TOOLS

• COUNTER DISPLAY	Page 71
•FLYER DISPLAY	Page 71
•LANYARD	Page 71
•PORTACHIAVI	Page 71
• SHELF HIGHLIGHTER	Page 70
•TOTEM	Page 70

VALIDITY

From 01 January 2022 to 31 December 2022

The data and characteristics indicated in this price list are subject to changes without prior notice.

The photographic reproduction of the shades of colour may not be perfectly faithful to reality.

In order to constantly improve the collections, the products contained in this catalogue could be replaced or modified. The photos contained are purely illustrative and not binding.





teamwork@sparco.it



sparcoteamwork.com

HEADQUARTERS

SPARCO S.p.A. Via Leini, 524 10088 Volpiano (TO) - Italy Tel. +39 011 22.40.911 e-mail: info@sparco.it www.sparco-official.com

BRANCHES

SPARCO TEAMWORK IBERIA, SL C/ Illa de Buda, 2 Polígono industrial Can Canals 08192 Sant Quirze del Vallés. Barcelona +34 93 806 54 94 info@iberia.sparcoteamwork.com